


"SINGLE CELL" LA-MAINTENANCE BATTERY CHARGER TYPE CLA1A60

DESIGNED FOR RECHARGING OF 200-400 AH LA-BATTERY CELLS

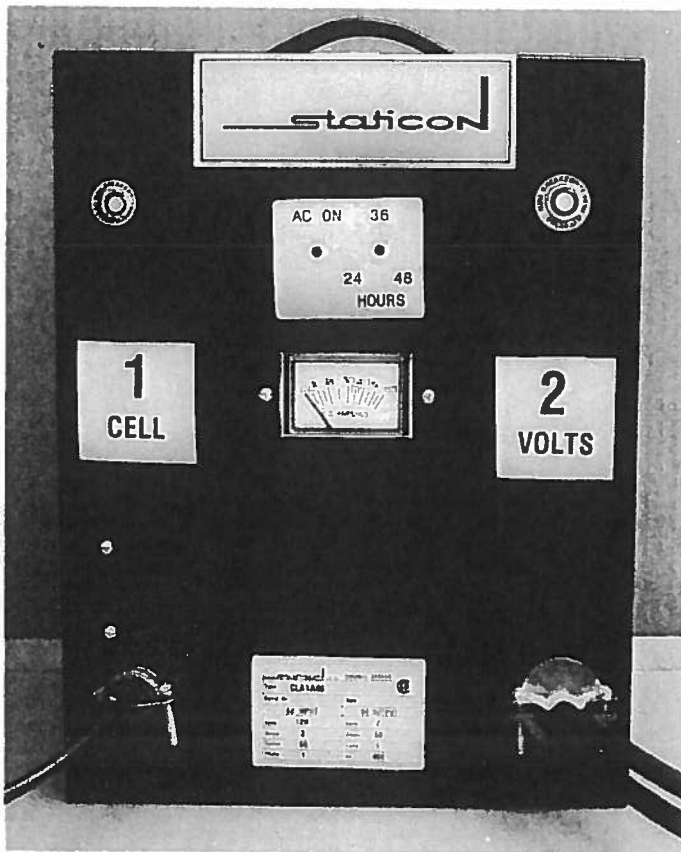

FEATURES

- FAIL SAFE IE(i) REGULATED
- SOLID STATE TIMER PROTECTED
"AC-SHUT OFF"
- SHOCK RESISTANT
(75A) DC-AMMETER(75A) DC-AMMETER
- REVERSE POLARITY AND
SHORT CIRCUIT PROTECTED.
- "LED" AC-ON LIGHT
- 6 FT AC LINE CORD
C/W PLUG (120V ,3A AC-INPUT)
- 8 FT #2 AWG DC CABLE
C/W HEAVY DUTY CLIPS
- MEETS CSA 22.2/4.18 FOR
MTG ON COMBUSTIBLE SURFACES
- CSA-APPROVED-BUILT TO UL,
NEMA, OSHA REQUIREMENTS
- EASY TO CARRY 35 LBS
- DIM'S 14"H, 10"W, 10"D.

OPERATION OF 60 AMP SINGLE CELL L.A. BATTERY CHARGER

- 1 TURN DC BREAKERS "OFF"
- 2 PLUG AC-LINE CORD INTO 120V AC OUTLET - GREEN LIGHT "ON".
- 3 RECOMENDED TIMER SETTINGS ARE:
24 HRS FOR 200AH 36 HRS FOR 300AH 48 HRS FOR 400AH BATTERY.
- 4 CONNECT ALLIGATOR CLAMPS TO "*SINGLE CELL ONLY*" ! *OBSERVING POLARATIES* !
- 5 TURN DC-BREAKER "ON" IF BRK TRIPS WITHIN 10 SECONDS
CHECK FOR REVERSED POLARITY OR SHORTED CELL.

DC-AMMETER START-UP READING- GUIDELINES

- A 50-70A START-UP INDICATES CELL NEEDS FULL RECHARGE.
- B 30-50A START-UP INDICATES CELL IS ~80% CHARGED.
- C 10-30A START-UP INDICATES CELL *MAY BE SULFATED.*
LEAVE CHARGER "ON" FOR 48 HRS OR LONGER.

NOTE : FOR BATTERY PROBLEMS ALWAYS CHECK INSTALLATION AND CONSULT BATTERY MANUAL.

OTHER STATICON MINE-RECTIFIER PRODUCTS

- HEAVY DUTY TRACTION TYPE RECRIFIER
- MINE-LOCO"DC-TRACTION" BATTERY CHARGER.
- HIGH DC-VOLTAGE CHARGERS FOR "AC-TRACTION
- QUICK- CHARGE OPPORTUNITY BATTERY CHARGER.

STATICON LTD

390 TAPSCOTT RD, SCARBOROUGH
ONTARIO CANADA M1B 2Y9

TEL.(416)291-3723 FAX.(416)291-3871

Web: www.staticon.ca E-mail: lasales@staticon.ca