


Nominal DC V	A	Style	Dimensions mm (in)			Weight kg (lb)
			H	W	D	

24	200	F	1600 (63)	610 (24)	610 (24)	270 (595)
24	300	F	1600 (63)	610 (24)	610 (24)	330 (728)
24	400	F	1600 (63)	610 (24)	610 (24)	370 (816)
24	500	F	1905 (75)	610 (24)	762 (30)	410 (904)
24	600	F	1905 (75)	610 (24)	762 (30)	465 (1025)
24	800	F	1905 (75)	610 (24)	762 (30)	540 (1191)
24	1000	F	1905 (75)	762 (30)	762 (30)	680 (1499)
24	1200	F	1905 (75)	762 (30)	762 (30)	740 (1631)

48	150	F	1600 (63)	610 (24)	610 (24)	320 (705)
48	200	F	1600 (63)	610 (24)	610 (24)	350 (772)
48	300	F	1600 (63)	610 (24)	610 (24)	430 (948)
48	400	F	1905 (75)	610 (24)	762 (30)	490 (1080)
48	500	F	1905 (75)	610 (24)	762 (30)	520 (1146)
48	600	F	1905 (75)	610 (24)	762 (30)	600 (1323)
48	800	F	1905 (75)	762 (30)	762 (30)	730 (1609)
48	1000	F	1905 (75)	762 (30)	762 (30)	860 (1896)
48	1200	F	1905 (75)	762 (30)	762 (30)	1000 (2205)

View 'B' Anchoring Detail




Redundant Rectifiers & Telecom Dc Power Systems

Parallel, floor mount rectifiers are mounted side by side on a floor-based channel frame complete with supervisory, distribution and other converter modules housed above.

Notes

- EEMAC / NEMA / CSA indoor type 1 cabinets.
- 14 / 10 gage steel panels / mounting channels.
- Standard finish is ASA 61 grey, baked enamel.
- Accessibility via front door. Top / side cable entry.
- 305 / 610 mm (12 / 24 in) rear / top air space required.
- All dimensions in **mm (inches)**.

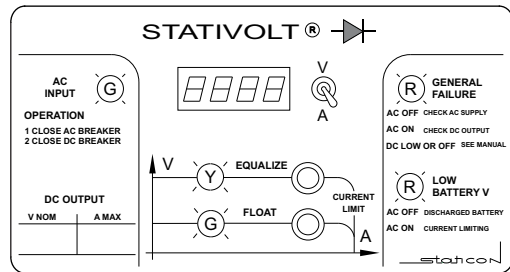

Various charge functions and alarms are available.

Scale: Not to scale	Title: Stativolt Telecom Rectifiers Three Phase AC Input Standard Cabinets	
Applications engineering and sales information.		
© Staticon Ltd., 2004, 2006, 2007	By: rh	Date: September 2007
	Drawing: telrec_3ph_cabs_0907	Rev 0